




252 Granite St, Corona, CA 92879  
PH (844) 469-6827  
aFeControl.com

**2004-2020 Ford F-150 2wd/ 4wd,**  
**2010-2014 Ford F-150 Raptor Rear Shock Installation**

Parts List:

-2 Sway-A-Way Shocks

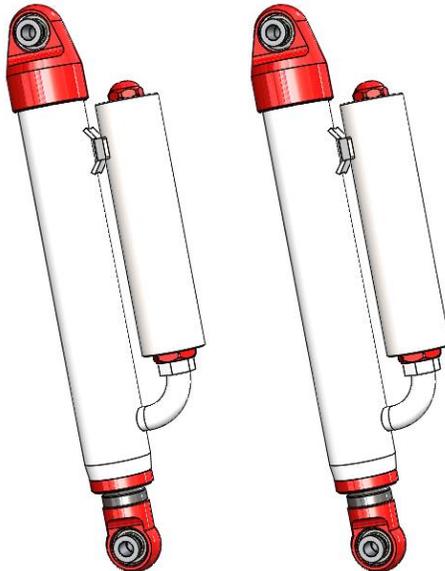

**Tool List**

- 15mm socket (stock shock bolt)
- 18mm wrench or socket (stock shock nut)
- Jack and jack stands
- Impact wrench (optional)
- Safety glasses

## **Removal and Installation Procedure for Ford F150 Rear** **(Shocks are already charged with Nitrogen)**

1. Park the vehicle on a level concrete surface where it is safe to work on your vehicle.
2. Lock and center the steering wheel.
3. Place blocks in front and behind the rear tires so as to keep the vehicle from moving forwards or backwards.
4. Using a jack lift the rear of the vehicle and support the vehicle using jack stands. Be sure to place the jack and jack stands securely on the frame near the rear of the vehicle. After placing the jack stands slowly lower the jack and remove the jack so that the rear suspension can hang freely. Remember to be alert and cautious when working under a vehicle.
5. Using a **15mm** wrench or socket and a **18mm** wrench or socket, remove the two bolts from the top and bottom of the OEM shock. Save the nuts and bolts, for use with your new Sway-A-Way shocks.



\* Picture is of F-150, not Raptor

6. Using the stock nuts and bolts, install your new shocks with the bottom eyelet first and the upper eyelet second.
7. Using a **15mm** wrench or socket and a **18mm** wrench or socket, tighten the upper and lower bolts to 50 ft-lbs.



8. Lift the vehicle, remove the jack-stands and lower the vehicle back on the ground.

9. The installation is complete. Drive the vehicle for 50 miles and re-torque nuts and bolts back to 50 ft-lbs.